

# Makita



# CONSTRUCTION CATALOG



[makitalatinamerica](http://makitalatinamerica.com)



# OVER 100 YEARS OF INNOVATION

As the innovation leader, Makita leads the industry with best-in-class quality cordless products. Makita's cordless products deliver the power, speed, and run-time to handle any project from wood and metalworking to concrete and dust extraction. From the job site to your home, Makita offers a wide range of cordless products ready to use anytime, anywhere.

## TECHNOLOGIES



### BRUSHLESS MOTOR

Eliminates carbon brushes, enabling the BL™ Motor to run cooler and more efficiently for longer life and maximum performance



### EXTREME PROTECTION TECHNOLOGY

XPT is a series of integrated seals engineered to channel away dust and water for increased durability in harsh conditions.



### ANTI-VIBRATION TECHNOLOGY

AVT is a counterbalance system inside the tool that reduces vibration for user safety with no compromise in power and performance



### AUTOMATIC TORQUE DRIVE TECHNOLOGY

Adjusts speed and torque for optimal performance, even in the most demanding applications.



### ACTIVE FEEDBACK-SENSING TECHNOLOGY

Electronically turns off the motor if rotation of the attachment is suddenly forced to stop to minimise the effect of kick-back.



### AUTO-START WIRELESS SYSTEM

Uses Bluetooth® technology for wireless power-on and power-off communication between the equipped tool and dust extractor.



### DEEP AND EXACT CUTTING TECHNOLOGY

More cutting capacity and out-of-the-box accuracy for superior cutting performance.



### SUPPRESSION OF MOTOR SPEED

Reduces RPM and vibration creating a more accurate starting for user convenience



### SUPER JOINT SYSTEM

SJS is a mechanical clutch system that helps prevent motor and gear damage in grinders if the wheel is forced to a stop for safety and durability.



### SUPER JOINT SYSTEM II

SJS II is a leaf spring and cam gear drive mechanism in grinders that is engineered to reduce vibration for increased user comfort during extended use.



MOST POWERFUL SYSTEM

Engineered to achieve the optimum power required for heavier load applications. These high-powered products are the one-battery solution to handle the most demanding jobs and environments.

OUTPOWER



OUTSMART



OUTLAST



40V MAX



80V MAX



125+ PRODUCTS\* ONE SYSTEM



WORLD'S LARGEST 18V SYSTEM

ONE SYSTEM. ENDLESS POSSIBILITIES Makita's Brushless Motor, battery technology, and enhanced communications work together to deliver maximum performance and efficiency for every trade

LXT BATTERY MORE RUN TIME



LXT RAPID CHARGER FASTER CHARGING



BRUSHLESS MOTOR LONGER MOTOR LIFE



STAR PROTECTION COMPUTER CONTROLS EFFICIENT POWER



18V



36V



320+ PRODUCTS\* ONE SYSTEM

## ACCESSORIES



**191A79-9**  
Flexible Hose  
120cm (47-1/4")



**191W58-9**  
Flexible Hose  
120cm (47-1/4")



**1911M9-1**  
Extension Pipe



**191A76-5**  
Lock on Adaptor



**191A77-3**  
Angle Adaptor



**191A78-1**  
Coupler Set (3pk)



**191W61-0**  
Adapter

# DGP180

EFFICIENT GREASE LUBRICATION FOR A  
WIDE RANGE OF APPLICATIONS

**LXT**

## DGP180 18V Grease Gun

- Features two speed modes: Low and Auto-Speed for better control
- Auto-Speed mode applies grease while varying the flow rate automatically
- Variable speed trigger allows the user to adjust discharge rate
- Lock-on button for user convenience during longer work periods
- 120 cm (47-1/4") flexible hose offers greater access for difficult to reach fittings
- Air bleed valve assists in faster pump priming

**69 MPA**  
(10,000 PSI)  
Max Pressure

**290 ml/min**  
(10.0 oz/min)  
Max Flow Rate

**Grease Capacity**  
w/ Barrel A: Cartridge / Bulk: 410 / 455 g (14.5 / 16.0 oz)  
w/ Barrel B: Cartridge / Bulk: 450 / 570 g (15.9 / 20.1 oz)  
w/ Barrel C: Cartridge / Bulk: 500 / 570 g (17.6 / 20.1 oz)



**TW001G**

**40V Max Impact Wrench**

- 3 forward and 3 reverse Auto-Stop modes for increased efficiency
- Higher torque and more compact
- Ultra-smooth variable speed trigger provides optimum control

Square Drive 19 mm (3/4")

Max Torque 1,800 N·m (1,330 ft.lbs.)

Nut Busting Torque 2,050 N·m (1,510 ft.lbs.)

0 - 950 / 1,150 / 1,400 / 1,800 RPM

0 - 1,900 / 2,200 / 2,400 / 2,500 IPM



**DTW1001**

**18V Impact Wrench**

- 3-speed power selection switch
- 3/4" anvil with friction ring and thru hole retention system for maximum productivity

Square Drive 19 mm (3/4")

Max Torque 1,250 N·m (920 ft.lbs.)

Nut Busting Torque 1,700 N·m (1,250 ft.lbs.)

0 - 900 / 1,000 / 1,800 RPM

0 - 1,800 / 2,000 / 2,200 IPM



**TW001G**

PROVIDES IMPROVED FASTENING CONTROL, IDEAL FOR AUTOMOTIVE, HEAVY MACHINERY MAINTENANCE, INSTALLATION, AND FABRICATION TRADES.





**XGT**

**RS002G**

EXTRA LARGE CUTTING CAPACITY. IDEAL FOR FRAMERS, BUILDERS, ROOFERS, FORMING, AND MORE.



**XGT** **BL** **XPT** **AWS** **BRAKE**  
**HS010G**  
 40V Max 235 mm (9-1/4") Circular Saw

- Aluminum plate base
- Magnesium diecast blade case
- Electric brake for maximum productivity

Max cutting capacity  
 90°: 85 mm (3-3/8")  
 45°: 61 mm (2-3/8")  
 60°: 41 mm (1-5/8")  
 4,000 RPM



**XGT** **BL** **XPT** **AWS** **BRAKE**  
**RS002G**  
 40V Max 260 mm (10-1/4") Circular Saw

- 2X faster cutting than a corded unit
- Cuts 4X material in a single pass
- Electric brake for maximum productivity

Max cutting capacity  
 90°: 95 mm (3-3/4")  
 45°: 70 mm (2-3/4")  
 56°: 54.5 mm (2-1/8")  
 4,000 RPM



**XGT** **BL** **XPT** **ADT** **BRAKE**  
**RS001G**  
 40V Max 185 mm (7-1/4") Circular Saw

- Optimum cutting performance
- Up to 375 cuts per charge in 2X4 SPF lumber
- Electric brake for maximum productivity

Max cutting capacity  
 90°: 65 mm (2-9/16")  
 45°: 45 mm (1-3/4")  
 53°: 38 mm (1-1/2")  
 6,400 RPM



**XGT** **BL** **XPT** **ADT** **AWS** **BRAKE**  
**HS003G**  
 40V Max 185 mm (7-1/4") Circular Saw

- Die-cast magnesium base, blade guard, and blade cover for a lightweight and durable design
- Electric brake for maximum productivity

Max cutting capacity  
 90°: 68.5 / 66 mm (2-11/16 / 2-5/8")  
 45°: 47.5 / 45.5 mm (1-7/8 / 1-13/16")  
 56°: 35.5 / 34 mm (1-3/8 / 1-5/16")  
 6,000 RPM



**LXT** **X2** **12V** **187V** **187V** **36V** **BRAKE**  
**DHS711**  
 36V 185 mm (7-1/4") Circular Saw

- Lightweight for operator comfort
- Reinforced magnesium base for durability
- Electric brake for maximum productivity

Max cutting capacity  
 90°: 68.5 / 66 mm (2-11/16 / 2-5/8")  
 45°: 49 / 47.5 mm (1-15/16 / 1-7/8")  
 50°: 44 / 42.5 mm (1-3/4 / 1-11/16")  
 4,800 RPM



**LXT** **X2** **12V** **187V** **187V** **36V** **BRAKE** **BL** **XPT** **ADT** **AWS** **BRAKE**  
**DHS781**  
 36V 185 mm (7-1/4") Circular Saw

- Delivers up to 610 crosscuts per charge in 2x4 SPF lumber using two 5.0Ah batteries
- Electric brake for maximum productivity

Max cutting capacity  
 90°: 68.5 / 66 mm (2-11/16 / 2-5/8")  
 45°: 47.5 / 45.5 mm (1-7/8 / 1-13/16")  
 56°: 35.5 / 34 mm (1-3/8 / 1-5/16")  
 6,000 RPM



**5007N**  
185 mm (7-1/4") Circular Saw

- Lower guard design improves performance when making bevel and narrow cuts
- Large ball bearings and gears for longer tool life

1,800W (15Amp)

Max cutting capacity  
90°: 63.5 mm (2-1/2")  
45°: 45 mm (1-3/4")  
50°: 35 mm (1-3/8")

5,800 RPM



**5008MG**  
210 mm (8-1/4") Circular Saw

- Magnesium components create a saw with less weight that's job site tough
- Ergonomically designed handle

1,800W (15Amp)

Max cutting capacity  
90°: 75.5 mm (3")  
45°: 57 mm (2-1/4")  
50°: 51.5 mm (2")

5,200 RPM



**5477NB**  
185 mm (7-1/4") Hypoid Saw

- Heat treated hypoid gears for long lasting performance
- Oversized top handle for added comfort

1,800W (15Amp)

Max cutting capacity  
90°: 60 mm (2-3/8")  
45°: 44 mm (1-3/4")  
50°: 40 mm (1-9/16")

4,500 RPM



**HS0600**  
260 mm (10-1/4") Circular Saw

- Cuts 4x material in a single pass
- Dual front and rear bevel supports provide additional rigidity for precise bevel cuts

2,000W (15Amp)

Max cutting capacity  
90°: 97 / 101 mm (3-13/16" / 4")  
45°: 68 / 71 mm (2-11/16" / 2-13/16")  
50°: 61 / 63 mm (2-3/8" / 2-1/2")

4,300 RPM



**2703**  
255 mm (10") Table Saw

- Smooth precision cutting on a large table: 560mm x 686mm (22" x 27")
- Lightweight for easy transportation

1,650W (15Amp)

Max cutting capacity  
90°: 91 mm (3-9/16")  
45°: 63 mm (2-1/2")

4,600 RPM



**2704**  
260 mm (10-1/4") Table Saw

- Smooth precision cutting on a large table: 665mm x 766mm (26-1/4" x 30-1/4")
- Electric brake for increased productivity

1,650W (15Amp)

Max cutting capacity  
90°: 93 mm (3-5/8")  
45°: 64 mm (2-1/2")

4,800 RPM

ACCESSORIES



**B-61656**  
7-1/4" 24T  
Carbide-Tipped  
Max Efficiency  
Circular Saw Blade



**D-03436**  
7-1/4" 24T  
Circular Saw Blade



**D-21521**  
8-1/4" 24T  
Carbide-Tipped  
Circular Saw Blade



**D-31728**  
8-1/4" 40T  
Carbide-Tipped  
Circular Saw Blade



**E-01965**  
9-1/4" 24T  
Carbide-Tipped  
Max Efficiency  
Circular Saw Blade



**A-94910**  
10-1/4" 24T  
Carbide-Tipped  
Circular Saw Blade



**195617-3**  
10" 24T  
Carbide-Tipped  
Circular Saw Blade

**XGT****HP001G**

FOR THE MOST DEMANDING DRILLING AND DRIVING APPLICATIONS IN WOOD, MASONRY AND METAL.



**XGT** **BL XPT AFT**  
**HP001G**  
40V Max Hammer Drill

- Electronic digital clutch (41 settings in low speed, 21 settings in high speed)
- Ultra-smooth variable speed trigger

Chuck capacity 13 mm (1/2")

Max Torque 125 N·m (1,100 in.lbs.)

0 - 650 / 0 - 2,600 RPM

0 - 9,750 / 0 - 39,000 IPM



**XGT** **BL XPT**  
**HP002G**  
40V Max Hammer Drill

- Compact in size, making it ideal for tight spaces
- 2 speed settings
- Ultra-smooth variable speed trigger

Chuck capacity 13 mm (1/2")

Max Torque 65 N·m (580 in.lbs.)

0 - 600 / 0 - 2,200 RPM

0 - 9,000 / 0 - 33,000 IPM



**LXI** **BL XPT**  
**DHP486**  
18V Hammer Drill

- 2-speed transmission
- Compact and ergonomic design
- All metal 1/2" self ratcheting chuck

Chuck capacity 13 mm (1/2")

Max Torque 125 N·m (1,100 in.lbs.)

0 - 550 / 0 - 2,100 RPM

0 - 8,250 / 0 - 31,500 IPM



**XGT** **BL XPT**  
**TD001G**  
40V Max Impact Driver

- Two Tightening Modes (T-mode) and Assist Mode (A-mode)
- One-touch 4-speed power selector button

Hex Shank 6.35 mm (1/4")

Max Torque 220 N·m (1,950 in.lbs.)

0 - 1,100 / 2,100 / 3,200 / 3,700 RPM

0 - 1,100 / 2,600 / 3,600 / 4,400 IPM



**XGT** **BL XPT**  
**TD003G**  
40V Max Impact Driver

- Digitally controlled mode; T-mode, for faster tightening of self-drilling screws
- Compact and ergonomic design

Hex Shank 6.35 mm (1/4")

Max Torque 210 N·m (1,860 in.lbs.)

0 - 1,100 / 2,100 / 3,200 / 3,700 RPM

0 - 1,400 / 2,600 / 3,600 / 4,100 IPM



**LXI** **BL XPT**  
**DTD172**  
18V Impact Driver

- Two Tightening Modes (T-mode) and Assist Mode (A-mode)
- One-touch 4-speed power selector button

Hex Shank 6.35 mm (1/4")

Max Torque 180 N·m (1,590 in.lbs.)

0 - 1,100 / 2,100 / 3,200 / 3,600 RPM

0 - 1,100 / 2,600 / 3,600 / 3,800 IPM



**HP1630  
Hammer Drill**

- Industrial aluminum gear housing for durability and long tool life
- Variable Speed Control Switch

710W (6.0 AMP)

Chuck capacity 16 mm (5/8")

0 - 3,200 RPM

0 - 48,000 IPM



**HP2050H  
Hammer Drill**

- Features a torque-limiting clutch that disengages automatically if the bit binds
- Variable Speed Control Switch

720W (6.6 AMP)

Chuck capacity 20 mm (3/4")

0 - 1,200 / 0 - 2,900 RPM

0 - 24,000 / 0 - 58,000 IPM



**HP2070  
Hammer Drill**

- Torque limiting clutch engineered to reduce gear damage
- Large variable speed trigger switch

1,010W (8.2 AMP)

Chuck capacity 20 mm (3/4")

0 - 1,200 / 0 - 2,900 RPM

0 - 24,000 / 0 - 58,000 IPM


ACCESSORIES




**D-72908**  
13 pc HSS  
Bit Set



**D-45836**  
General Purpose  
17 pc Bit Set

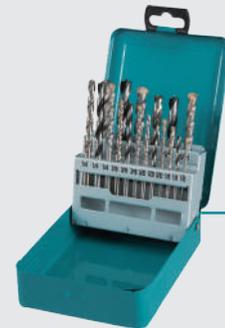


**D-59178**  
18 pc Assorted  
Bit Set

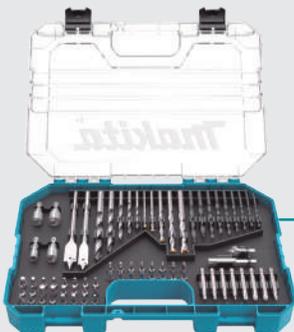

**E-06943**  
75 pc Drill  
and Bit Set



**E-15752**  
91 pc Screw Bit  
& Socket Set

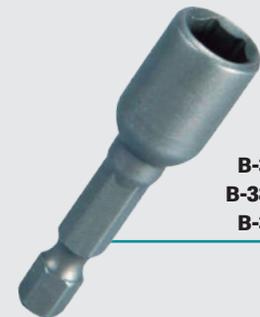

**Magnetic  
Nutsetter**

- B-38794** 6.4mm (1/4")
- B-38803** 7.9mm (5/16")
- B-38819** 9.5mm (3/8")



**B-25828**  
3 pc Phillips PH2 Bits  
2"



**B-48795**  
Compact Screw  
Guide Bit Holder



**Phillips  
PH2 Bits**  
**B-57788** 90mm (3-1/2")  
**B-57847** 150mm (6")

**XGT****TW004G**

PRECISE FASTENING CONTROL IS ACHIEVED THROUGH THE 4-SPEED POWER SELECTION SWITCH, WHICH ACCOUNTS FOR A WIDE RANGE OF APPLICATIONS.

**BL XPT**  
MOTOR**XGT**

### TW004G 40V Max Impact Wrench

- 3 forward and 3 reverse Auto-Stop modes for increased efficiency
- Compact length, ideal for working in tight spaces
- Ultra-smooth variable speed trigger provides optimum control

Square Drive 12.7 mm (1/2")

Max Torque 350 N·m (260 ft.lbs.)

Nut Busting Torque 630 N·m (465 ft.lbs.)

0 - 1,000 / 1,800 / 2,600 / 3,200 RPM

0 - 1,800 / 2,600 / 3,400 / 4,000 IPM

**BL XPT**  
MOTOR**XGT**

### TW007G 40V Max Impact Wrench

- 3 forward and 3 reverse Auto-Stop modes for increased efficiency
- Compact and ergonomic design
- Ultra-smooth variable speed trigger provides optimum control

Square Drive 12.7 mm (1/2")

Max Torque 760 N·m (560 ft.lbs.)

Nut Busting Torque 1,100 N·m (810 ft.lbs.)

0 - 600 / 1,200 / 1,900 / 2,300 RPM

0 - 1,200 / 1,900 / 2,700 / 2,900 IPM



**LXT** **BL MOTOR XPT**  
**DTW180**  
 18V Impact Wrench

- Ultra-compact and ergonomic design, ideal for working in tight spaces
- Reverse Rotation Auto-Stop Mode

Square Drive 9.5 mm (3/8")
Max Torque 180 N·m (130 ft.lbs.)
Nut Busting Torque 310 N·m (230 ft.lbs)
0 - 1,300 / 2,400 RPM
0 - 2,000 / 3,600 IPM



**LXT** **BL MOTOR XPT**  
**DTW190**  
 18V Impact Wrench

- Compact and ergonomic design
- Lightweight and rubberized soft grip handle for reduced operator fatigue

Square Drive 12.7 mm (1/2")
Max Torque 190 N·m (140 ft.lbs.)
Nut Busting Torque 320 N·m (236 ft.lbs.)
0 - 2,300 RPM
0 - 3,000 IPM



**LXT** **BL MOTOR XPT**  
**DTW181**  
 18V Impact Wrench

- Ultra-compact and ergonomic design, ideal for working in tight spaces
- Reverse Rotation Auto-Stop Mode

Square Drive 12.7 mm (1/2")
Max Torque 210 N·m (155 ft.lbs.)
Nut Busting Torque 330 N·m (245 ft.lbs)
0 - 1,300 / 2,400 RPM
0 - 2,000 / 3,600 IPM



**LXT** **BL MOTOR XPT**  
**DTW300**  
 18V Impact Wrench

- 3 forward and 3 reverse Auto-Stop modes
- 4-speed power selection for precise fastening control in a wide range of applications

Square Drive 12.7 mm (1/2")
Max Torque 330 N·m (240 ft.lbs.)
Nut Busting Torque 580 N·m (430 ft.lbs)
0 - 1,000 / 1,800 / 2,600 / 3,200 RPM
0 - 1,800 / 2,600 / 3,400 / 4,000 IPM



**LXT** **BL MOTOR XPT**  
**DTW700**  
 18V Impact Wrench

- 3 forward and 3 reverse Auto-Stop modes
- 4-speed power selection for precise fastening control in a wide range of applications

Square Drive 12.7 mm (1/2")
Max Torque 700 N·m (520 ft.lbs.)
Nut Busting Torque 1,000 N·m (740 ft.lbs.)
0 - 500 / 1,200 / 1,900 / 2,200 RPM
0 - 1,000 / 1,700 / 2,400 / 2,700 IPM



**LXT** **BL MOTOR**  
**DTW1002**  
 18V Impact Wrench

- 3-speed power selection switch
- 1/2" anvil with friction ring for quick and easy socket changes

Square Drive 12.7 mm (1/2")
Max Torque 1,200 N·m (890 ft.lbs)
Nut Busting Torque 1,600 N·m (1,180 ft.lbs.)
0 - 900 / 1,000 / 1,800 RPM
0 - 1,800 / 2,000 / 2,200 IPM



**TW0350**  
 Impact Wrench

- Efficient impact system with less vibration for longer tool life
- Externally accessible brushes for easy replacement

400W (3.5 AMP)
Square Drive 12.7 mm (1/2")
Max Torque 350 N·m (260 ft.lbs.)
2,000 RPM
2,000 IPM



**6906**  
 Impact Wrench

- Precision gearing for smooth and efficient power transmission
- Side handle rotates 360° for operator convenience

850W (9.0 AMP)
Square Drive 19 mm (3/4")
Max Torque 588 N·m (441 ft.lbs.)
1,700 RPM
1,600 IPM



	MODEL	DESCRIPTION	RPM	SWITCH	TECHNOLOGIES
<b>XGT</b>		<b>GA004G</b> 40V Max 4-1/2" Angle Grinder	8,500	Slide	<b>BL MOTOR XPT (BRAKE) AFT</b>
		<b>GA012G</b> 40V Max 4-1/2" Angle Grinder	8,500	Paddle	<b>BL MOTOR XPT (BRAKE) AFT</b>
		<b>GA022G</b> 40V Max 4-1/2" Angle Grinder	Variable speed 3,000 - 8,500	Slide	<b>BL MOTOR XPT (BRAKE) AFT AWS</b>
		<b>GA025G</b> 40V Max 4-1/2" Angle Grinder	Variable speed 3,000 - 8,500	Slide	<b>BL MOTOR XPT AFT AWS</b>
		<b>GA028G</b> 40V Max 4-1/2" Angle Grinder	Variable speed 3,000 - 8,500	Paddle	<b>BL MOTOR XPT (BRAKE) AFT AWS</b>
		<b>GA031G</b> 40V Max 4-1/2" Angle Grinder	Variable speed 3,000 - 8,500	Paddle	<b>BL MOTOR XPT AFT AWS</b>
		<b>GA037G</b> 40V Max 7" Angle Grinder	7,800	Large Trigger	<b>BL MOTOR XPT (BRAKE) AFT AWS</b>
		<b>GA038G</b> 40V Max 9" Angle Grinder	6,600	Large Trigger	<b>BL MOTOR XPT (BRAKE) AFT AWS</b>
<b>LXT</b>		<b>DGA455</b> 18V 4-1/2" Angle Grinder	8,500	Paddle	<b>BL MOTOR XPT AFT ADT</b>
		<b>DGA462</b> 18V 4-1/2" Angle Grinder	Variable speed 3,000 - 8,500	Slide	<b>BL MOTOR XPT AFT ADT AWS</b>
		<b>DGA468</b> 18V 4-1/2" Angle Grinder	Variable speed 3,000 - 8,500	Paddle	<b>BL MOTOR XPT AFT ADT AWS (BRAKE)</b>

	MODEL	DESCRIPTION	POWER	RPM	SWITCH	TECH
	GA4530	4-1/2" Angle Grinder	720W 6.0Amp	11,000	Slide	
	GA4534	4-1/2" Angle Grinder	720W 6.0Amp	11,000	Paddle	
	9557HNG	4-1/2" Angle Grinder	840W 7.5Amp	11,000	Slide	
	9557HPG	4-1/2" Angle Grinder	840W 7.5Amp	11,000	Paddle	
	9564CV	4-1/2" Angle Grinder	1,400W 12Amp	Variable speed 2,800 - 12,000	Slide	
	GA4550	4-1/2" Angle Grinder	1,300W 11Amp	11,000	Slide	
	GA4591	4-1/2" Angle Grinder	1,900W 15Amp	Variable speed 2,800 - 11,500	Slide	  
	GA4592	4-1/2" Angle Grinder	1,900W 15Amp	11,500	Slide	 
	GA4593	4-1/2" Angle Grinder	1,900W 15Amp	Variable speed 2,800 - 11,500	Paddle	  
	GA4595	4-1/2" Angle Grinder	1,900W 15Amp	11,500	Paddle	 
	GA5020	5" Angle Grinder	1,050W 10.5Amp	12,000	Trigger	
	GA5021C	5" Angle Grinder	1,450W 12.5Amp	10,000	Large Trigger	
	GA7082	7" Angle Grinder	2,700W 15Amp	8,500	Large Trigger	
	GA7080	7" Angle Grinder	2,700W 15Amp	8,500	Large Trigger	Rotatable Handle
	GA7070	7" Angle Grinder	2,800W 15Amp	8,500	Large Trigger	 Rotatable Handle 
	GA9082	9" Angle Grinder	2,700W 15Amp	6,600	Large Trigger	
	GA9080	9" Angle Grinder	2,700W 15Amp	6,600	Large Trigger	Rotatable Handle
	GA9070	9" Angle Grinder	2,800W 15Amp	6,600	Large Trigger	 Rotatable Handle 

ACCESSORIES



**B-69587**  
4"

Diamond Blade  
Segmented  
General Purpose



**B-69593**  
4-1/2"

Diamond Blade  
Segmented  
General Purpose



**B-69618**  
5"

Diamond Blade  
Segmented  
General Purpose



**B-69624**  
7"

Diamond Blade  
Segmented  
General Purpose



**E-02515**  
9"

Diamond Blade  
Segmented  
General Purpose




**E-02060**  
X-LOCK 4-1/2"

Diamond Blade  
Segmented  
Concrete, Marble  
and granite



**A-98871**  
5"

Low-Vibration  
Diamond Cup Wheel  
Turbo

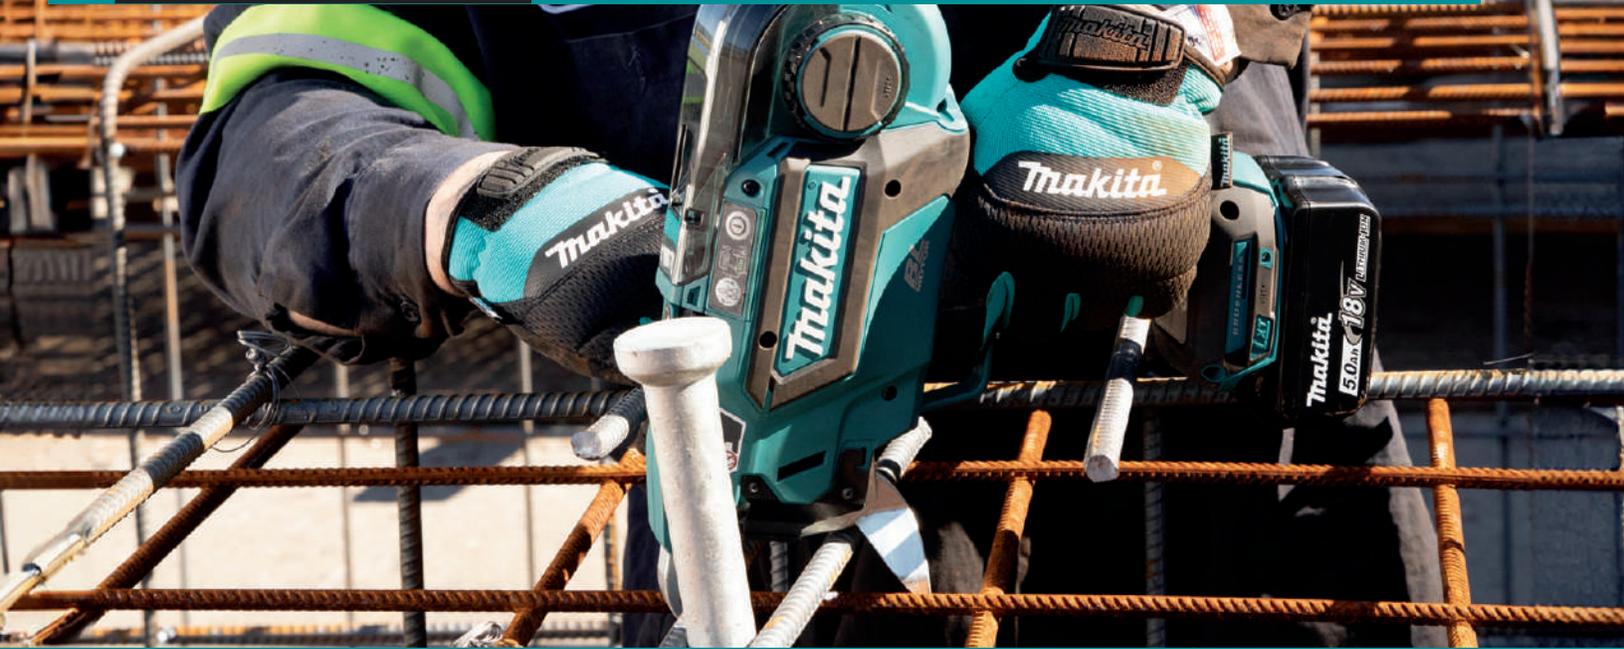

# FAST & EFFICIENT TYING



FAST AND SEAMLESS WIRE REEL EASY-LOAD DESIGN



SINGLE OR CONTINUOUS WIRE TIE ACTUATION



DIGITAL ADJUSTMENT OF TYING STRENGTH



**LXT**  
**DTR180**  
18V Rebar Tying Tool

- Up to 5,300 ties of #3 x #3 diameter rebar using an 18V 5.0Ah Battery
- Center load reel position provides added balance

Rebar Size Capacity: #3x#3 - #5x#5

Wire Diameter (gauge): 21 ga.

Tying Speed (second): .8

Tying Strength Levels: 6



**BL MOTOR XPT**  
**DTR181**  
18V Rebar Tying Tool

- Up to 5,000 ties of #4 x #4 diameter rebar using an 18V 5.0Ah Battery
- Center load reel position provides added balance

Rebar Size Capacity: #4x#4 - #8x#7

Wire Diameter (gauge): 21 ga.

Tying Speed (second): .8

Tying Strength Levels: 6

## ACCESSORIES



**191L22-4**  
Steel Tie Wire, 21 Ga.  
50/pk



**191M27-0**  
Extension Handle



# VR004G

DELIVERS MORE RUN TIME WITH MAXIMUM VIBRATIONS PER MINUTE (VPM) FOR STRENGTHENING CONCRETE WHEN RUNNING A CORDED TOOL IS NOT AN OPTION.



**XGT**  
**VR001G**  
40V Max Concrete Vibrator

- Two-power mode selection allows the use of the tool for a wide range of job site applications
- Protective cover to help prevent battery contamination
- Compact and ergonomic

Vibrations Per Minute (VPM):  
Power mode: 15,500 / Normal mode: 12,000

Tool only (no flexible shaft)



**XGT**  
**VR004G**  
40V Max Concrete Vibrator

- Two-power mode selection allows the use of the tool for a wide range of job site applications
- Protective cover to help prevent battery contamination
- Compact and ergonomic

Vibrations Per Minute (VPM):  
Power mode: 15,500 / Normal mode: 12,000

Shaft: ø 38 mm (1-1/2") / Length: 2.4mt (96")



**LXT**  
**DVR850**  
18V Concrete Vibrator

- Dual directional switch to conveniently hold the tool in either horizontal or vertical positions
- Protective cover to help prevent battery contamination
- Compact and ergonomic

Vibrations Per Minute (VPM): 12,500

Shaft: ø 25 mm (1") / Length: 2.4mt (96")



**VR1000**  
Concrete Vibrator

- Lever style lock system for quick tool-less shaft installation
- Rubber cover protects against accidental contact with the hot gear housing after prolonged use
- IPX4 water resistance

2,000 W (15Amp)

Vibrations Per Minute (VPM): 12,500

## ACCESSORIES



**1910C2-9**  
32mm x 2.4mt (1-1/4" x 8')  
Flexible Shaft  
For VR001G and VR004G

**1910C4-5**  
38mm x 2.4mt (1-1/2" x 8')  
Flexible Shaft  
For VR001G and VR004G

**198701-3**  
35mm x 3.5mt (1-3/8" x 11.5')  
Flexible Shaft  
For VR1000

**198702-1**  
35mm x 4.5mt (1-3/8" x 14.8')  
Flexible Shaft  
For VR1000



199116-7  
Flatbed Pipe Frame



198494-2  
Steel bucket

LXT

**DCU180Z**

**18V Power-Assisted Wheelbarrow**

- Holds 2X 18V batteries but operates using 1 battery at a time
- 7" mechanical disc brake for faster stopping
- L.E.D. lights on each side of frame
- Handles adjust to 3 different height levels

Max load capacity: 130 kg (290 lbs.)

Traveling Speed:

Forward (High / Low): 0 - 3.5 / 0 - 1.5 km/h

Reverse: 0 - 1.0 km/h

Max climbing capacity: 12°

BL MOTOR XPT



Functions as a Manual Dump with separate accessories

LXT

**DCU604Z**

**36V Power-Assisted Wheelbarrow with Carrier**

- Holds 4X 18V batteries but operates using 2 batteries at a time
- Hand lever-operated mechanical axle disc brake plus electromagnetic brake (motor)
- Headlights, taillight, warning beeper and level gauge for more convenience

Max load capacity: 300 kg (661 lbs.)

Traveling Speed:

Forward (3 speed option): 0 - 1.5 / 3.5 / 5.0 km/h

Reverse: 0 - 1.0 km/h

Max climbing capacity: 12°

BL MOTOR XPT



Electric lift  
475 x 1,020 mm

LXT

**DCU601Z**

**36V Power-Assisted Wheelbarrow Electric lift**

- Holds 4X 18V batteries but operates using 2 batteries at a time
- Hand lever-operated mechanical axle disc brake plus electromagnetic brake (motor)
- Headlights, taillight, warning beeper and level gauge for more convenience

Max load capacity: 300 kg (661 lbs.)

Traveling Speed:

Forward (3 speed option): 0 - 1.5 / 3.5 / 5.0 km/h

Reverse: 0 - 1.0 km/h

Max climbing capacity: 12°

BL MOTOR XPT



Electric dump up to 75°  
Manually up to 110°

LXT

**DCU602Z**

**36V Power-Assisted Wheelbarrow Electric Dump**

- Holds 4X 18V batteries but operates using 2 batteries at a time
- Hand lever-operated mechanical axle disc brake plus electromagnetic brake (motor)
- Headlights, taillight, warning beeper and level gauge for more convenience

Max load capacity: 300 kg (661 lbs.)

Traveling Speed:

Forward (3 speed option): 0 - 1.5 / 3.5 / 5.0 km/h

Reverse: 0 - 1.0 km/h

Max climbing capacity: 12°

BL MOTOR XPT



	MODEL	DESCRIPTION	POWER	IMPACT ENERGY	BPM	TECH
<b>CORDED</b>		<b>HM001G</b> 40V Max SDS MAX Demolition Hammer		9.4J	0 - 2,600	<b>BL MOTOR</b> <b>XPT</b> <b>AVT</b> <b>SOFT NOLOAD</b> <b>AWS</b>
		<b>HM002G</b> 80V Max SDS MAX Demolition Hammer		20.9J	950 - 1,900	<b>BL MOTOR</b> <b>XPT</b> <b>AVT</b> <b>SOFT NOLOAD</b> <b>AWS</b>
		<b>HM0810B</b> Hex Demolition Hammer	420W 8.3Amp	5.3J	2,900	
		<b>HM0870C</b> SDS MAX Demolition Hammer	1,100W 10 Amp	7.6J	1,100 - 2,650	
		<b>HM1101C</b> SDS MAX Demolition Hammer	1,300W 10 Amp	11.5J	1,100 - 2,650	
		<b>HM1203C</b> SDS MAX Demolition Hammer	1,510W 14 Amp	19.1J	950 - 1,900	
		<b>HM1205C</b> SDS MAX Demolition Hammer	1,510W 14 Amp	19.1J	950 - 1,900	
		<b>HM1211B</b> Hex Demolition Hammer	1,090W 10 Amp	14.2J	2,000	
		<b>HM1213C</b> SDS MAX Demolition Hammer	1,510W 14 Amp	18.6J	950 - 1,900	<b>AVT</b> <b>SOFT NOLOAD</b>
		<b>HM1214C</b> SDS MAX Demolition Hammer	1,510W 14 Amp	19.9J	950 - 1,900	<b>AVT</b> <b>SOFT NOLOAD</b>
		<b>HM1307CB</b> Hex Demolition Hammer	1,510W 14 Amp	23.6J	730 - 1,450	
		<b>HM1317CB</b> Hex Demolition Hammer	1,510W 14 Amp	26.5J	730 - 1,450	<b>AVT</b> <b>SOFT NOLOAD</b>
		<b>HM1502</b> Hex Demolition Hammer	1,850W 15 Amp	48.0J	1,300	
		<b>HM1512</b> Hex Demolition Hammer	1,850W 15 Amp	48.0J	1,300	<b>AVT</b> <b>SOFT NOLOAD</b>
		<b>HM1812</b> Hex Demolition Hammer	2,000W 15 Amp	72.8J	870	<b>AVT</b> <b>SOFT NOLOAD</b>

**ACCESSORIES**



**D-42450**  
SDS MAX Chisel Set 3pc



**D-42472**  
SDS MAX Chisel Set 5pc



**B-10621**  
SDS MAX Self- Sharpening Bull Point



**751420-A**  
1-1/8" Hex Bull Point



**751220-A**  
1-1/8" Hex Flat Chisel



**D-61569**  
1-1/8" Hex Bull Point



**D-61575**  
1-1/8" Hex Cold Chisel



**XGT**

# CE001G

HAS THE POWER TO CUT THROUGH VARIOUS MASONRY AND METAL MATERIALS WITH ALL THE BENEFITS AND CONVENIENCE OF CORDLESS OPERATION.



**XGT X2** **BL MOTOR XPT AFT (BRAKE)**  
**CE001G**  
 80V Max Power Cutter

- Delivers the power of a 75.6cc Gas Saw with up to 25% faster cutting
- Integrated Anti-Vibration mechanism
- Integrated front Aluminum wheels
- Integrated water delivery system with water flow adjustment knob

Wheel Diameter 355 mm (14")
Max Cutting Capacity 127 mm (5")
No Load Speed 5,300 RPM

## ACCESSORIES



**E-16748**

14" Thin Kerf Diamond Blade, Segmented, General Purpose

2X FASTER CUTTING COMPARED TO STANDARD BLADES



**LXT** **BL MOTOR XPT AFT (BRAKE)**  
**DCE090**  
 36V Power Cutter

- Eliminates the hassles of gas with lower weight, reduced maintenance, and zero emissions
- Electric brake stops the wheel in 4 seconds or less allowing for faster re-positioning
- Integrated water delivery system with water flow adjustment knob

Wheel Diameter 230 mm (9")
Max Cutting Capacity 88 mm (3-1/2")
No Load Speed 6,600 RPM

## ACCESSORIES



**E-02515**

9" Diamond Blade, Segmented, General Purpose

UP TO 4X LONGER LIFE COMPARED TO STANDARD BLADES



**SJS**  
**SG1251J**  
 Wall Chaser

- Ergonomically designed front handle
- Adjustable cutting depth
- Easy-to-pull two-finger trigger

1,400W (14Amp)
Blade Diameter 125 mm (5")
Max Cutting Capacity Depth: 0-30 mm (0 - 1-3/16") Width: 6-30 mm (1/4 - 1-3/16")
No Load Speed 10,000 RPM

## ACCESSORIES



**B-69618**

5" Diamond Blade, Segmented, General Purpose

UP TO 4X LONGER LIFE COMPARED TO STANDARD BLADES



	MODEL	DESCRIPTION	IMPACT ENERGY	MORE SPECS	TECHNOLOGIES
	<b>HR001G</b>	40V Max SDS PLUS Rotary Hammer 28 mm (1-1/8")	2.8J	0 - 980 RPM 0 - 5,000 BPM	<b>BL</b> MOTOR <b>XPT</b> <b>AVT</b> <b>AWS</b> <b>SOFT</b> <b>AFT</b> NOLOAD
	<b>HR003G</b>	40V Max SDS PLUS Rotary Hammer 28mm (1-1/8")	2.8J	0 - 980 RPM 0 - 5,000 BPM	<b>BL</b> MOTOR <b>XPT</b> <b>AVT</b>
	<b>HR007G</b>	40V Max SDS PLUS Rotary Hammer 28mm (1-1/8")	3.0J	0 - 980 RPM 0 - 5,000 BPM	<b>BL</b> MOTOR <b>XPT</b> <b>AVT</b> <b>AWS</b> <b>AFT</b>
	<b>HR008G</b>	40V Max SDS PLUS Rotary Hammer 30 mm (1-3/16")	3.9J	0 - 840 RPM 0 - 4,500 BPM	<b>BL</b> MOTOR <b>XPT</b> <b>AVT</b> <b>AWS</b> <b>AFT</b>
	<b>HR009G</b>	40V Max SDS PLUS Rotary Hammer 30 mm (1-3/16")	3.9J	0 - 840 RPM 0 - 4,500 BPM	<b>BL</b> MOTOR <b>XPT</b> <b>AVT</b> <b>AWS</b> <b>AFT</b>
	<b>HR005G</b>	40V Max SDS MAX Rotary Hammer 40 mm (1-9/16")	8.0J	250 - 500 RPM 1,450 - 2,900 BPM	<b>BL</b> MOTOR <b>XPT</b> <b>AVT</b> <b>AWS</b> <b>SOFT</b> <b>AFT</b> NOLOAD
	<b>HR006G</b>	80V Max SDS MAX Rotary Hammer 52 mm (2-1/16")	20.0J	150 - 310 RPM 1,100 - 2,250 BPM	<b>BL</b> MOTOR <b>XPT</b> <b>AVT</b> <b>AWS</b> <b>SOFT</b> <b>AFT</b> NOLOAD



	MODEL	DESCRIPTION	IMPACT ENERGY	MORE SPECS	TECHNOLOGIES
	<b>DHR165</b>	18V SDS PLUS Rotary Hammer <b>16 mm (5/8")</b>	1.3J	0 - 1,600 RPM 0 - 5,300 BPM	<b>XPT</b>
	<b>DHR171</b>	18V SDS PLUS Rotary Hammer <b>17 mm (11/16")</b>	1.2J	0 - 680 RPM 0 - 4,800 BPM	<b>BL MOTOR</b>
	<b>DHR182</b>	18V SDS PLUS Rotary Hammer <b>18 mm (11/16")</b>	1.7J	0 - 1,350 RPM 0 - 5,000 BPM	<b>BL MOTOR XPT AWS AVT</b>
	<b>DHR241</b>	18V SDS PLUS Rotary Hammer <b>20 mm (13/16")</b>	1.9J	0 - 1,100 RPM 0 - 4,000 BPM	
	<b>DHR242</b>	18V SDS PLUS Rotary Hammer <b>24 mm (15/16")</b>	2.0J	0 - 950 RPM 0 - 4,700 BPM	<b>BL MOTOR XPT</b>
 <b>QUICK CHANGE DRILL CHUCK</b>	<b>DHR264</b>	36V SDS PLUS Rotary Hammer <b>26 mm (1")</b>	2.5J	0 - 1,250 RPM 0 - 5,000 BPM	<b>XPT</b>
	<b>DHR280</b>	36V SDS PLUS Rotary Hammer <b>28 mm (1-1/8")</b>	2.8J	0 - 980 RPM 0 - 5,000 BPM	<b>BL MOTOR XPT AVT SOFT NO LOAD</b>

**LXT**

CORDED	MODEL	DESCRIPTION	POWER	IMPACT ENERGY	MORE SPECS	TECHNOLOGIES
	 HR1840	SDS PLUS Rotary Hammer 18 mm (11/16")	470W 4.5 Amp	1.4J	0 - 2,100 RPM 0 - 4,800 BPM	
	 HR2470	SDS PLUS Rotary Hammer 24 mm (15/16")	780W 7 Amp	2.4J	0 - 1,100 RPM 0 - 4,500 BPM	
	 HR2630J	SDS PLUS Rotary Hammer 26 mm (1")	800W 7 Amp	2.4J	0 - 1,200 RPM 0 - 4,600 BPM	
	 HR2631FT	SDS PLUS Rotary Hammer 26 mm (1")	800W 7 Amp	2.4J	0 - 1,200 RPM 0 - 4,600 BPM	<b>AVT</b>
	 HR3001CJ	SDS PLUS Rotary Hammer 30 mm (1-3/16")	1,050W 7.5 Amp	3.9J	0 - 840 RPM 0 - 4,500 BPM	
	 HR3011FCJ	SDS PLUS Rotary Hammer 30 mm (1-3/16")	1,050W 7.5 Amp	3.9J	0 - 840 RPM 0 - 4,500 BPM	<b>AVT</b>
	 HR3012FCJ	SDS PLUS Rotary Hammer 30 mm (1-3/16")	1,050W 7.5 Amp	3.9J	0 - 840 RPM 0 - 4,500 BPM	<b>AVT</b>
	 HR3200C	SDS PLUS Rotary Hammer 32 mm (1-1/4")	850W 7 Amp	5.1J	315 - 630 RPM 1,650 - 3,300 BPM	
	 HR4003C	SDS MAX Rotary Hammer 40 mm (1-9/16")	1,100W 11 Amp	8.3J	250 - 500 RPM 1,450 - 2,900 BPM	
	 HR4013C	SDS MAX Rotary Hammer 40 mm (1-9/16")	1,100W 11 Amp	8J	250 - 500 RPM 1,450 - 2,900 BPM	<b>AVT SOFT NOLOAD</b>
	 HR4041C	Spline Rotary Hammer 40 mm (1-9/16")	1,100W 11 Amp	9.2J	230 - 460 RPM 1,300 - 2,600 BPM	
	 HR4510C	SDS MAX Rotary Hammer 45 mm (1-3/4")	1,350W 13.5 Amp	9.4J	130 - 280 RPM 1,250 - 2,750 BPM	<b>AVT</b>
	 HR5000	Spline Rotary Hammer 50 mm (2")	1,200W 11 Amp	11.3J	260 RPM 2,100 BPM	
	 HR5202C	SDS MAX Rotary Hammer 52 mm (2-1/16")	1,510W 15 Amp	19.1J	150 - 310 RPM 1,100 - 2,250 BPM	
 HR5212C	SDS MAX Rotary Hammer 52 mm (2-1/16")	1,510W 15 Amp	20J	150 - 310 RPM 1,100 - 2,250 BPM	<b>AVT SOFT NOLOAD</b>	

ACCESSORIES



**D-08757**  
SDS PLUS Chisel Set 4pc



**D-16368**  
SDS PLUS Chisel Set 5pc



**194041-7**  
SDS PLUS Chuck adapter



**D-53637**  
SDS PLUS Drill & Chisel Set 17pc



**D-71205**  
SDS PLUS Drill & Chisel Set 14pc



**D-42450**  
SDS MAX Chisel Set 3pc



**D-42472**  
SDS MAX Chisel Set 5pc

**ANCHOR HOLE CLEAN-UP**



**BL MOTOR XPT**

**XGT**  
**AS001G**  
40V Max Dust Blower

- 4 digitally controlled speeds
- 5 nozzles included
- Built-in L.E.D. light

Max Air Volume 39 CFM

Max Air Velocity 447 MPH

Max sealed suction 10.3 kPa



**BL MOTOR XPT**

**LXI**  
**DAS180**  
18V Dust Blower

- 4 digitally controlled speeds
- 5 nozzles included
- Built-in L.E.D. light

Max Air Volume 39 CFM

Max Air Velocity 447 MPH

Max sealed suction 10.3 kPa

**CONCRETE SEALING**



**LXI**

**DCG180**  
18V Caulking Gun

- Drip-reduction feature automatically relieves pressure to the material to prevent excess waste
- 5-speed dial optimizes flow rate

Max Dispersing Force 5,000 N (1,100 lbs)

No load speed 0 - 28 mm/sec. (0 - 66 in/min.)

Holder Size 300, 600, 800 mL

**MIXING CONCRETE AND MORTAR**



**BL MOTOR XPT**

**XGT**  
**UT001G**  
40V Max Mixer

- Dual handle design with ergonomic soft grip
- Battery protective cover
- Variable speed dial

Blade diameter 240 mm (9-1/2")

0 - 500 / 0 - 920 RPM



**BL MOTOR XPT**

**XGT**  
**UT002G**  
40V Max Mixer Keyed Chuck

- Dual handle design with ergonomic soft grip
- Battery protective cover
- Variable speed dial

Chuck Size 13 mm (1/2")

0 - 500 / 0 - 920 RPM



**BL MOTOR XPT**

**LXI**  
**DUT130**  
18V Mixer

- Rubber splash guard
- Battery protective cover
- Variable speed dial

Blade diameter 165 mm (6-1/2")

0 - 350 / 0 - 1,300 RPM



**BL MOTOR XPT**

**LXI**  
**DUT131**  
18V Mixer Keyed Chuck

- Rubber splash guard
- Battery protective cover
- Variable speed dial

Chuck Size 13 mm (1/2")

0 - 350 / 0 - 1,300 RPM



**XGT**

**UB001G**

QUIETER, LIGHTER AND MORE POWERFUL THAN GAS



**XGT**  
**UB001G**  
40V Max Blower

**BL**  
MOTOR

- Up to 44% more blowing force than a 24.5cc gas blower
- Turbo boost mode delivers 565 CFM for heavy debris
- Cruise control lever with variable speed trigger

Max. Air Volume 565 CFM

Max. Air Velocity 143 MPH

0 - 23,000 RPM



**LXT**  
**DUB184**  
18V Blower

**BL** **XPT**  
MOTOR

- In-line fan design provides better tool balance and improved ergonomics
- Speed lock for convenient continuous operation
- Cruise control lever with variable speed trigger

Max. Air Volume 459 CFM

Max. Air Velocity 116 MPH

0 - 18,000 RPM



**LXT**  
**XPT** **100V** • **100V** • **36V**  
**DUB363ZV**  
36V Blower / Vacuum

**BL** **XPT**  
MOTOR

- 3-tools-in-1: vacuum, mulcher and blower
- Cruise control lever with variable speed trigger
- Speed lock for convenient continuous operation

Max. Air Volume 473 CFM

Max. Air Volume 120 CFM

0 - 7,850 RPM



**UB1103**  
Blower / Vacuum

- Two tools in one; quickly converts to a vacuum for added versatility
- Variable speed control dial and trigger
- Large trigger with conveniently located lock-on button


Max. Air Volume 145 CFM

Max. Air Velocity 203 MPH

0 - 16,000 RPM



ACCESSORIES

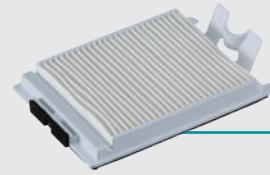

**127725-2**  
HEPA Filter  
For DVC265



**197903-8**  
Filter Dust Bag, 10/Pk  
For DVC265




**191C26-2**  
Filter Bag, 10/pk  
For DVC665



**191C30-1**  
Reusable Dust Bag  
For DVC665



**191D12-9**  
Main HEPA Filter  
For DVC665



**P-70219**  
Filter Cartridge  
For VC2000L



**P-72899**  
Filter Bag, 5/pk  
For VC2000L



**195441-4**  
Powder Filter  
For VC3210L



**195440-6**  
Poly Bag 10/Pk  
For VC3210L



**LXT**  
X2 18V • ESD 36V **BL** MOTOR **XPT** **AWS** **HEPA** filter  
**DVC265**  
36V Backpack Dry Dust Extractor

- Up to 62 minutes of continuous operation using two 18V 5.0Ah batteries
- Compact and lightweight design

Capacity Paper Dust Bag: 2 L Cloth Dust Bag: 1.5 L
Air Flow Rate 64 CFM
Max Sealed Suction 11 kPa



**LXT**  
X2 18V • ESD 36V **BL** MOTOR **XPT** **AWS** **HEPA** filter  
**DVC665**  
36V Backpack Dry Dust Extractor

- Up to 62 minutes of continuous operation using two 18V 5.0Ah batteries
- Filter cleaning mechanism

Capacity Paper Dust Bag: 6 L Cloth Dust Bag: 5.5 L
Air Flow Rate 64 CFM
Max Sealed Suction 11 kPa



**VC2000L**  
Class L GYUPPA Vacuum (Wet & Dry)

- Push & Clean semi-automatic filter cleaning system
- Convenient integrated carry handle

1,000W
Tank capacity 20L
Air volume 3,6 m³/min
Max Sealed Suction 21.0 kPa



**VC3210L**  
Class L GYUPPA Vacuum (Wet & Dry)

- Vacuum turns on or off automatically when connected power tool is turned on or off
- Automatic self-cleaning filter

1,050W
Tank capacity: Dust 32L / Water 27L
Air volume 2.0 m³/min
Max Sealed Suction 22.0 kPa

BATTERY BACKPACK SOLUTIONS



**IDEAL FOR ALL DAY WORK**

**ADJUSTABLE ERGONOMIC HARNESS**

**L.E.D. BATTERY CHARGE LEVEL INDICATOR**



**CONNECTX**  
**PDC01**  
Portable Power Pack

- Holds up four LXT batteries
- Provides up to 2X run time with LXT X2 (36V) products and 4X run time with LXT 18V products

Energy output 432 Wh

Compatible with ConnectX™, 40V max XGT, LXT 18V and 18V X2 (36V) systems (Adapters sold separately)



**CONNECTX**  
**PDC1200A02**  
Portable Power Pack

- Integrated battery
- Equivalent to having almost 14X LXT 18V batteries
- Durable Design IPX4-rated

Energy output 1,200 Wh

Compatible with ConnectX™, 40V max XGT, LXT 18V and 18V X2 (36V) systems (Adapters sold separately)



**CONNECTX** **BL MOTOR XPT**  
**UB002C**  
Backpack Blower

- Delivers the power of a 64cc gas backpack blower
- For use with Portable Power Pack PDC1200 only

Max. Air Volume 670 CFM

Max. Air Velocity 160 MPH

High blowing force 22 N

DISTANCE MEASURING



**LD030P**  
Laser Distance Measure

- Simplified user interface button
- Top-class accuracy
- Dust and water resistance (IP 54)
- Includes (2) AAA batteries

Measuring range up to 30 mt (98')

Accuracy at 10mt (33') : +/- 2mm (5/64")

Laser class 2: 635 nm



**LD050P**  
Laser Distance Measure

- Multiple measurement functions
- Top-class accuracy
- Dust and water resistance (IP 54)
- Includes (2) AAA batteries

Measuring range up to 50 mt (164')

Accuracy at 10mt (33') : +/- 2mm (5/64")

Laser class 2: 635 nm



**LD080P**  
Laser Distance Measure

- Multiple measurement functions
- Top-class accuracy
- Dust and water resistance (IP 54)
- Includes (2) AAA batteries

Measuring range up to 80 mt (262')

Accuracy at 10mt (33') : +/- 1.5mm (1/16")

Laser class 2: 635 nm



**XGT**  
**ML005G**  
40V Max LED Work Light

- 3 Brightness Settings
- Compatible with 40V max and 18V batteries
- Dust / water-resistant construction (IP65 rated)
- Angle adjusting knobs

Illuminance at 1m from the light source  
(High / Mid / Low): 2,100 / 1,000 / 500 lx

Luminous flux (High / Mid / Low):  
3,600 / 1,800 / 900 lm



**XGT**  
**ML009G**  
40V Max LED Work Light

- 3 Brightness Settings
- Compatible with 40V max and 18V batteries
- Dust / water-resistant construction (IP65 rated)
- Angle adjusting knobs

Illuminance at 1m from the light source  
(High / Mid / Low): 4,300 / 1,900 / 1,000 lx

Luminous flux (High / Mid / Low):  
10,000 / 4,000 / 2,000 lm



**LXT** **XPT**  
**DML805**  
18V Cordless/Corded LED Work Light

- 2-mode operation
- 18V Battery or corded operation
- Integrated handle can be used as a hanging hook
- Angle adjusting knobs

Illuminance at 1m from the light source  
300 / 200 lx

Luminous flux:  
750 / 450 lm

**ACCESSORIES**



**GM00001381**  
Tripod for DML805



**GM00002073**  
Tripod for  
DML809 / DML811 / ML005G / ML009G



**LXT**  
**DML814**  
18V LED Tower Work Light

- 3 Brightness Settings
- Extends to an overall height of 2,240mm (7-1/4 ft)
- Dust / water-resistant construction (IP65 rated)
- Adjustable light heads rotate 180° vertically

Illuminance at 1m from the light source  
(High / Mid / Low): 1,250 / 750 / 400 lx

Luminous flux (High / Mid / Low):  
3,000 / 1,700 / 900 lm



**LXT**  
**X2 18V + 18V 36V**  
**DML810**  
36V Upright LED Area Light

- 3 Brightness Settings and 3 illumination range modes: 360°, left 180°, and right 180°
- Self-righting design
- Dust / water-resistant construction (IP54 rated)

Illuminance at 1m from the light source  
(High / Mid / Low): 550 / 300 / 150 lx

Luminous flux (High / Mid / Low):  
5,500 / 3,000 / 1,500 lm



**XGT**

# KT001G

A CONVENIENT WAY TO BOIL WATER WHETHER ON THE JOBSITE OR ENJOYING THE OUTDOORS.



**XGT**

## CW001G 40V Max 20 L (5.3 gal) Cooler & Warmer

- Powered by 4 sources: 40V battery and 18V battery (two in parallel or one), 12V/24V DC (cigar socket), AC.
- 7 Cooling temperature settings and 7 Warming temperature settings

Cooling capacity from -18 to 10°C (0 to 50°F)

Warming capacity from 30 to 60°C (85 to 140°F)



**XGT**

## KT001G 40V Max Hot Water Kettle

- Powered by 40V battery (two in parallel or one)
- Audible buzzer and two color L.E.D. on/off switch indicates the status of the kettle
- Dual layer construction
- Boil-dry protection and Auto shut-off

Water Tank Capacity 800 mL

Boils 800ml (27 oz.) of water in 8 min.



**XGT**

## CF001G 40V Max 235 mm (9-1/4") Fan

- Three speed settings and Oscillation selector for optimal air velocity and control
- Manually tilts 90° up and 45° down
- Automatically oscillates 45° right and left
- 3-stage automatic timer

Air Flow 5.2 / 6.5 / 8.2 m3/min

Max Air Velocity 120 / 150 / 190 m/min



**LXT**  
**DFV214**  
18V / 12V Fan Vest

- Stay cool in hot harsh job site environments
- Front buckle fastening design allows users mobility and ensures optimum fit
- Breathable water-repellent fabric with Antibacterial and deodorant lining

4 air flow settings (turbo / high / med / low)  
Different size options



**LXT**  
**DCW180**  
18V 20 L (5.3 gal) Cooler & Warmer

- Powered by 3 sources: 18V battery (two in parallel or one), 12V/24V DC (cigar socket), AC
- 5 Cooling temperature settings and 2 Warming temperature settings
- Water-resistant construction (IPX4 rated)

Cooling capacity from -18 to 10°C (0 to 50°F)  
Warming capacity 55 / 60°C (130 / 140°F)



**LXT**  
**DCM501**  
18V Coffee Maker

- No paper filter needed
- Compatible with both 12V and 18V batteries
- Brews one 160mL (5 oz.) cup of coffee in 5 minutes
- Boil dry protection

Water Tank Capacity 240 mL  
Uses single-serve packs or ground coffee



**LXT**  
**DCF102**  
18V 180 mm (7-1/8") Fan

- Three speed settings and Oscillation selector
- Reduced wind noise level for quiet operation
- Manually tilts 90° up and 45° down
- Automatically oscillates 45° right and left
- 3-stage automatic timer

Air Flow 3.0 / 3.8 / 4.6 m³/min  
Max Air Volume 162 CFM



**LXT**  
**DCF203**  
18V 235 mm (9-1/4") Fan

- Three speed settings and Oscillation selector
- Reduced wind noise level for quiet operation
- Manually tilts 90° up and 45° down
- Automatically oscillates 45° right and left
- 3-stage automatic timer

Air Flow 5.2 / 6.5 / 8.2 m³/min  
Max Air Velocity 120 / 150 / 190 m/min



**LXT**  
**DCF201**  
18V 250 mm (9-7/8") Fan

- Two speed settings
- Protective bumpers for increased durability
- 45° adjustable platform
- 3-stage automatic timer
- Large carrying handle

Max. Air Volume 5.0m³/min  
Max Air Velocity 90 / 120 m/min



**LXT**  
**DMR055**  
18V Radio/Lantern

- Multi functions: Lantern, FM/AM radio, flashlight, USB output port
- 9 programmable stations each for AM and FM radio
- Warm white light tone and color

Illuminance (High): 130 lx or more  
Luminous flux (High): 260 lm or more



**LXT**  
**DMR114**  
18V Bluetooth Radio

- Compatible with both 12V and 18V batteries
- Equipped with Bluetooth to wirelessly connect your mobile device to play music
- Delivers rich, full stereo sound from two powerful 2.5" side-firing speakers and one 4" subwoofer

Frequency Band 87.5 - 108 MHz / 522 - 1,710 kHz  
USB port for charging your mobile device



**LXT**  
**DMR300**  
18V Bluetooth Radio

- Compatible with both 12V and 18V batteries
- Equipped with Bluetooth to wirelessly connect your mobile device to play music
- Delivers rich stereo sound from two powerful 3.5" side-firing speakers

Frequency Band FM / AM: 87.5 - 108 MHz / 520 - 1,710 kHz  
Two USB ports for charging mobile devices



### FitKnit™ Cut Level 1 Nitrile Coated Dipped Gloves

- High abrasion resistance for increased performance
- Touchscreen compatible for phone and tablet use

T-04117 (Small/Medium)  
T-04123 (Large/X-Large)



### Open Cuff Flex Protection Utility Work Gloves

- High dexterity for flexibility, easy movement, and better control
- Touchscreen compatible for phone and tablet use

T-04151 (Medium)  
T-04167 (Large)  
T-04173 (X-Large)



### Advanced Impact Demolition Gloves

- Up to 20% more thermoplastic rubber (TPR) for increased impact protection
- Touchscreen compatible for phone and tablet use

T-04248 (Medium)  
T-04254 (Large)  
T-04260 (X-Large)



# BATTERIES & CHARGERS

					
<b>22 MIN.</b> CHARGE TIME	<b>28 MIN.</b> CHARGE TIME	<b>45 MIN.</b> CHARGE TIME	<b>45 MIN.</b> CHARGE TIME	<b>50 MIN.</b> CHARGE TIME	<b>76 MIN.</b> CHARGE TIME

**2X LONGER RUN TIME**

HIGH OUTPUT BATTERY

## COMPACT SIZE      LONGER RUN TIME

**2.0Ah Battery**  
191L29-0  
BL4020

**2.5Ah Battery**  
191B36-3  
BL4025

**4.0Ah Battery**  
191B26-6  
BL4040

**4.0Ah Battery**  
1910N6-8  
BL4040F

**5.0Ah Battery**  
191L47-8  
BL4050F

**8.0Ah Battery**  
191X65-8  
BL4080F



**DC40RC**  
Standard Charger  
191M85-6 (120V) / 191M90-3 (240V)



**DC40RA**  
Rapid Charger  
191F37-5 (120V) / 191E07-8 (240V)



**DC40RB**  
Dual Port Charger  
191N04-8 (120V) / 191N09-8 (240V)

## COMPATIBILITY

### ADP10 (191C09-2)




Adapts 40V max XGT chargers to charge 18V LXT batteries

# LXT BATTERIES & CHARGERS



## FASTER CHARGE TIME

## HIGHEST OUTPUT

**1.5Ah Battery**  
196235-0  
BL1815N

**2.0Ah Battery**  
197254-9  
BL1820B

**3.0Ah Battery**  
197599-5  
BL1830B

**4.0Ah Battery**  
197267-0  
BL1840B

**5.0Ah Battery**  
197280-8  
BL1850B

**6.0Ah Battery**  
632F69-8  
BL1860B



**DC18SD**  
Standard Charger  
630567-0 (120V) / 630570-1 (240V)



**DC18RC**  
Rapid Charger  
196433-6 (120V) / 195584-2 (220V)



**DC18SE**  
Automotive Charger  
194618-8



**DC18RD**  
Dual Port Charger  
196963-7 (120V) / 196933-6 (220V)



**DC18SF**  
4-Port Charger  
196426-3

# Makita



SCAN ME

